

1800A00095, NK Cables  
Port 1 into SI-20A  
Swept Frequency PIM Data




F2 DOWN from 1880.0 to 1826.0 MHz. F1 Fixed at 1805.0 MHz  
F1 UP from 1805.0 to 1831.0 MHz. F2 Fixed at 1880.0 MHz

3rd Order

IM Response, dBm

REFERENCE VALUE = -120.0 dBm

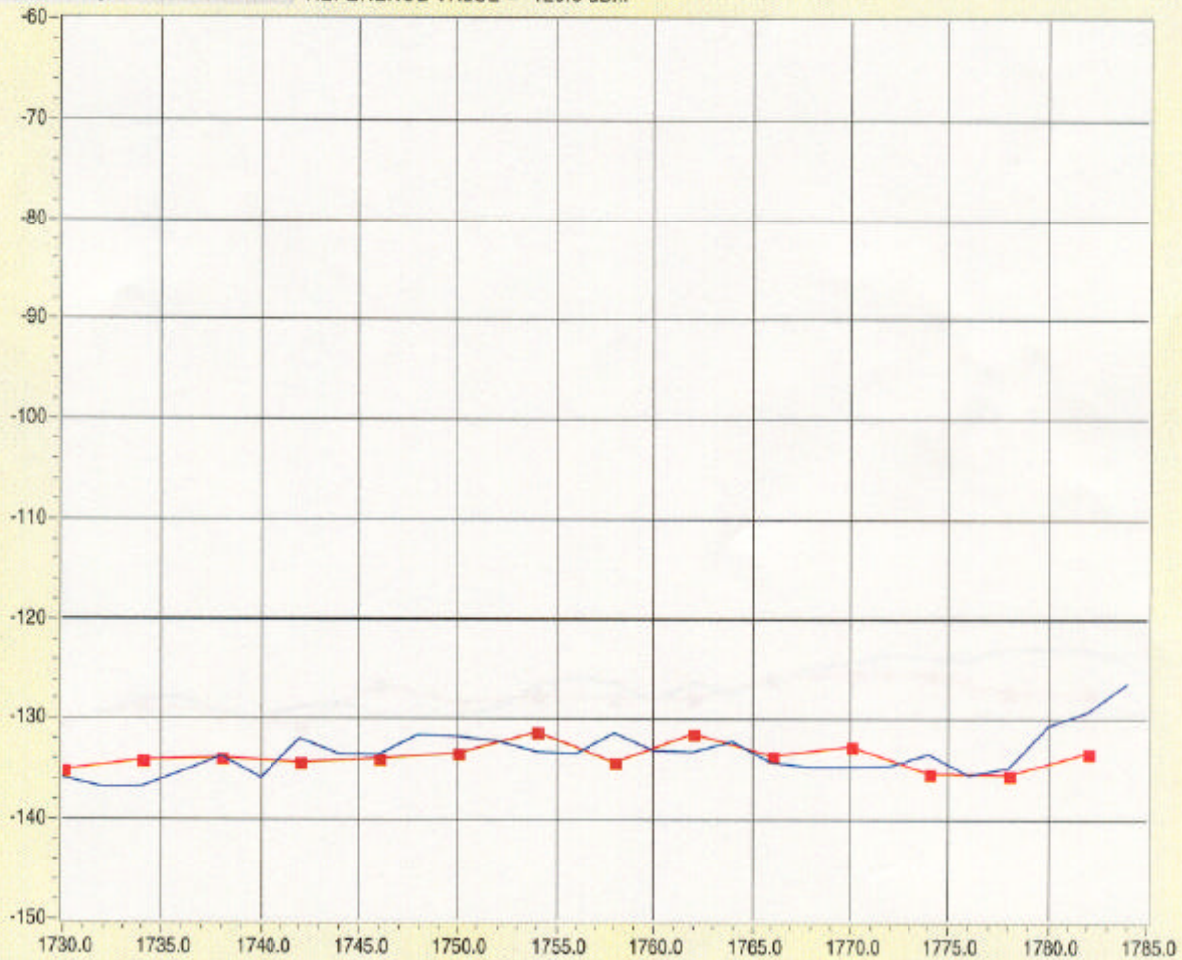

F1 Power, +42.9 dBm

3rd Order IM Frequency, MHz

F2 Power, +42.9 dBm

Reflected (Reverse) IM Power

Wednesday, April 25, 2001; 1:05 PM

SI-1800A Passive Intermodulation Analyzer

Rev. 3.40; November, 2000