


1900A00088, WJ Communications
Port 1 into SI-30
Swept Frequency PIM Data



F2 DOWN from 1990.0 to 1950.0 MHz. F1 Fixed at 1930.0 MHz
F1 UP from 1930.0 to 1950.0 MHz. F2 Fixed at 1990.0 MHz

3rd Order
IM Response, dBm

REFERENCE VALUE = -120.0 dBm

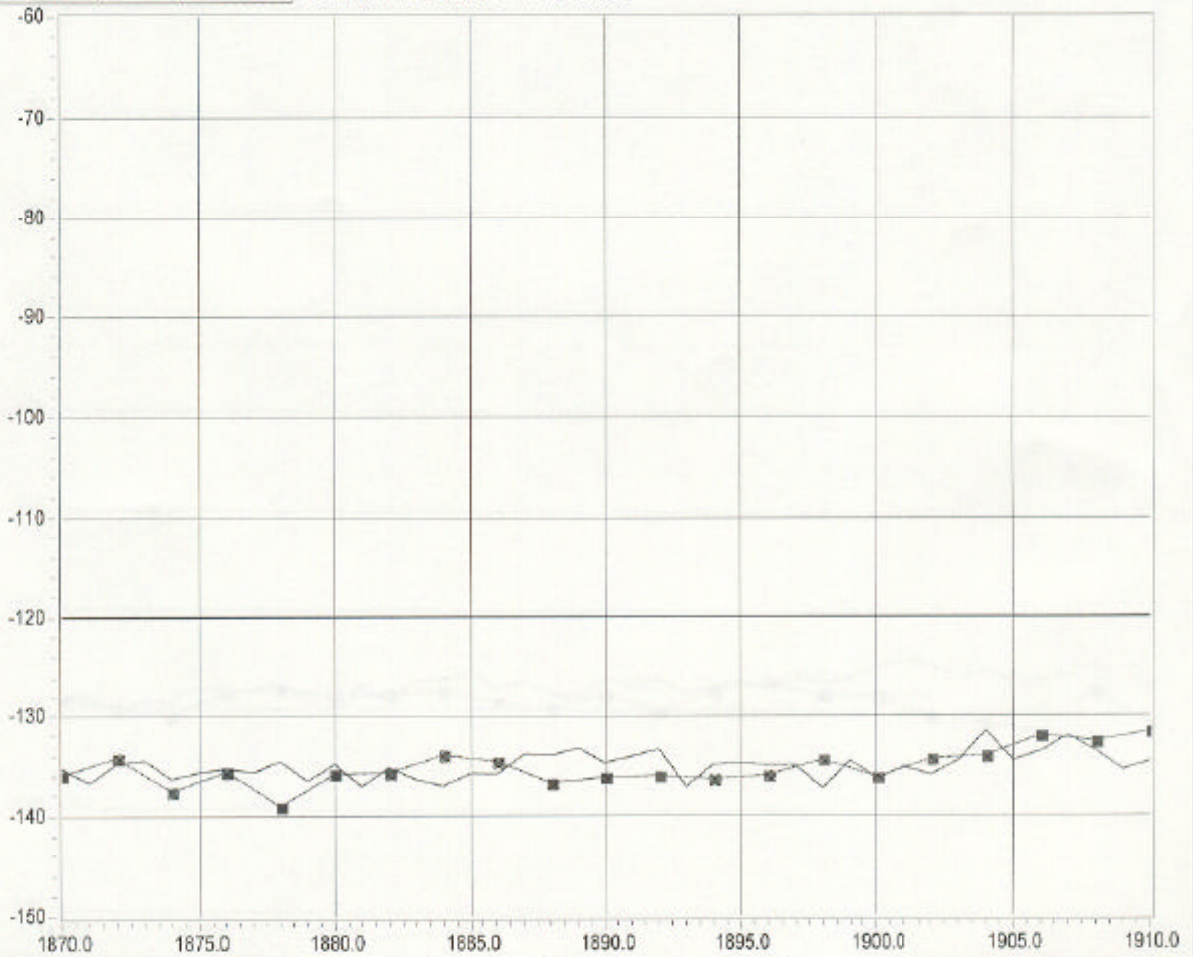

F1 Power, +43.0 dBm

3rd Order IM Frequency, MHz

F2 Power, +43.2 dBm

Reflected (Reverse) IM Power

Monday, December 18, 2000; 12:49 PM