

0900A00077 Opt K, Kathrein Germany
Port 1 into SI-30
Swept Frequency PIM Data




F2 DOWN from 960.0 to 955.0 MHz. F1 Fixed at 935.0 MHz
F1 UP from 935.0 to 937.4 MHz. F2 Fixed at 960.0 MHz

3rd Order

IM Response, dBm

REFERENCE VALUE = -120.0 dBm

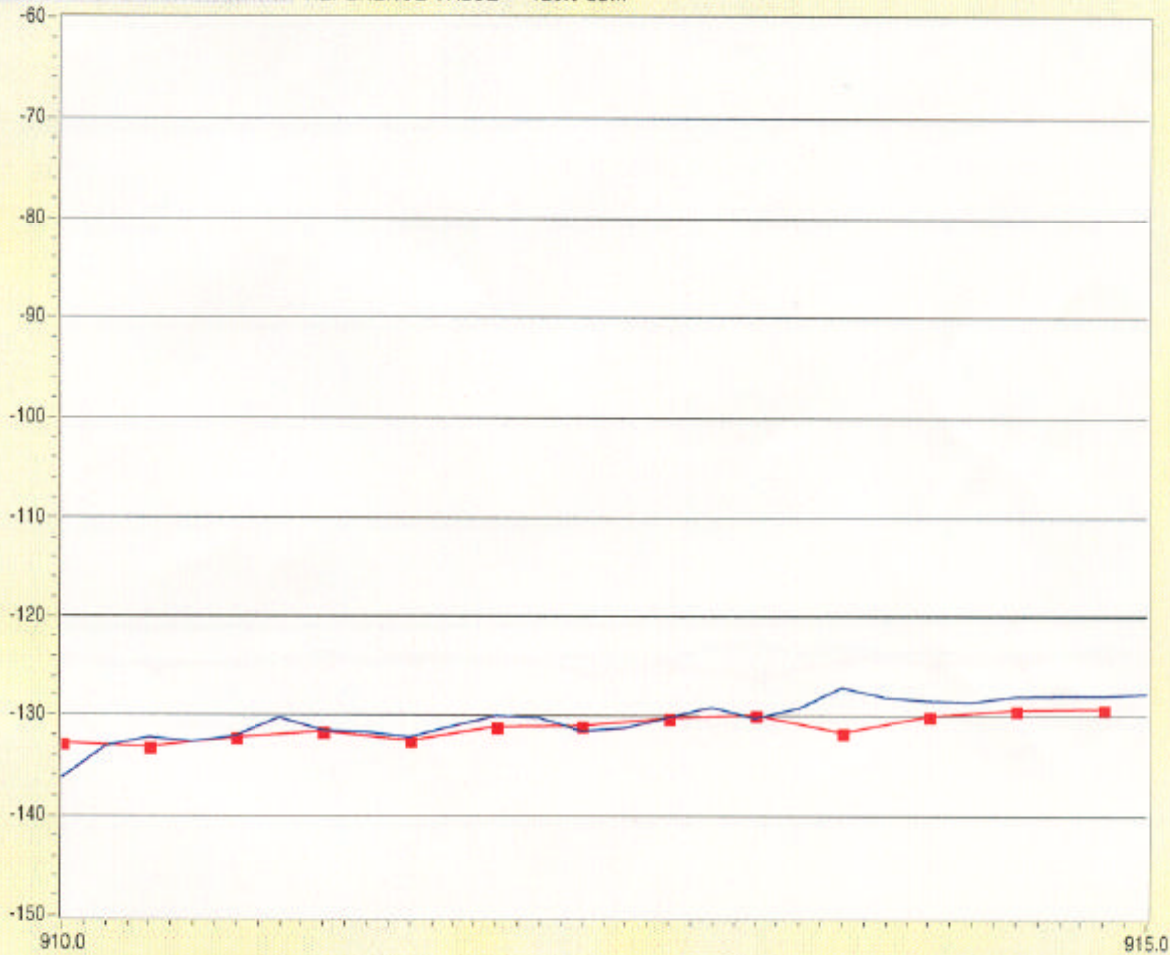

F1 Power, +42.9 dBm

3rd Order IM Frequency, MHz

F2 Power, +42.9 dBm

Reflected (Reverse) IM Power

Tuesday, December 05, 2000; 9:15 AM

SI-900A Passive Intermodulation Analyzer Option K

Rev. 3.40; November, 2000